


# Orion DuraFlow & EnergySaver

NEW 4" PORTED PLATE HEAT EXCHANGER

The new 4" ported Orion plate exchanger from SPX is designed to cover a wide range of applications and secure even better solutions for customers in the energy, food, marine and industrial segments.

By implementing features developed over the past 10 years we can now deliver an even more cost effective heat exchanger with a superior ratio between plate thickness and pressure rating.

	FEATURE	ADVANTAGES	WHAT'S IN IT FOR YOU!
A	CORNERLOCK	SUPERIOR PLATE STACK STABILITY ENABLES THE USE OF THINNER AND MORE EFFICIENT PLATES WITHOUT COMPROMISING MECHANICAL STRENGTH.	INCREASED PRODUCTION TIME AS MAINTENANCE TIME IS REDUCED TO A MINIMUM. SERVICE CAN BE DONE EASILY BY PERSONNEL ON SITE SAVING BOTH TIME AND MONEY. LONGER LIFE TIME OF PLATE PACK.
B	GRADUATED CHOCOLATE BOX DISTRIBUTION	BETTER THERMAL PERFORMANCE OF PLATE -> REDUCTION IN M <sup>2</sup> OF REQUIRED HEAT TRANSFER AREA AND IMPROVED PERFORMANCE	
C	EASYCLIP	IMPROVED STABILITY OF GASKET AND REDUCED RISK OF GASKET BLOWOUT.	

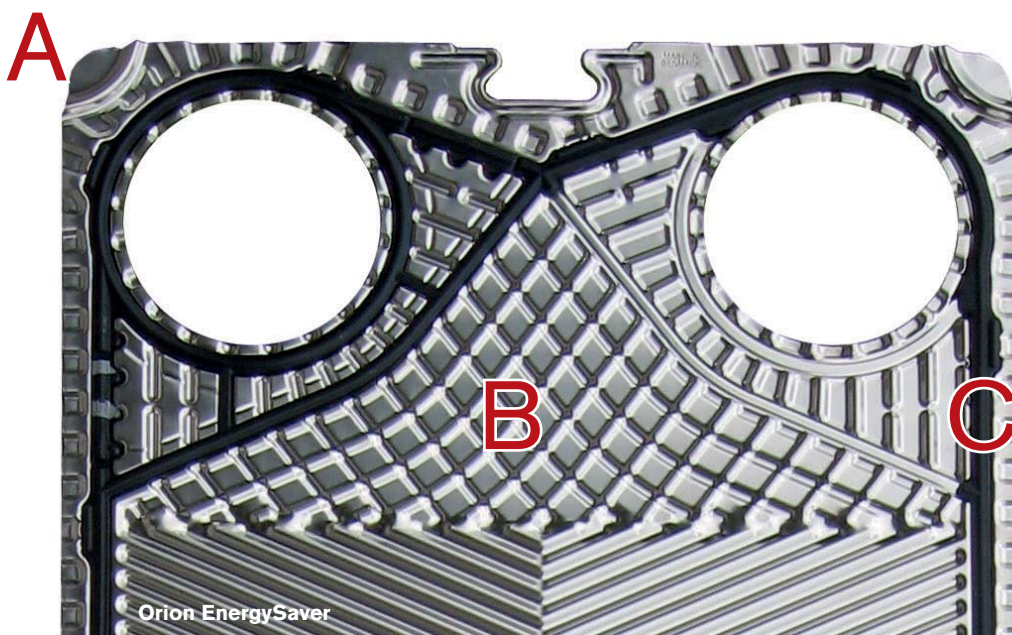

## Frame dimensions:

FRAME	WIDTH IN MM (INCH)	HEIGHT IN MM (INCH)	CONNECTION DIAMETER MM (INCH)	DESIGN
ORION 034 MGS-10	448 (17)	1348 (53)	100 (4)	INDUSTRIAL FRAME
ORION 034 MGS-16	465 (18)	1356 (53)		
ORION 050 MGS-10	448 (17)	1809 (71)		
ORION 050 MGS-16	465 (18)	1817 (71)		
ORION 034 RKS-06	453 (18)	1580 (62)		
ORION 034 RKS-10	495 (19)	1580 (65)		SANITARY FRAME
ORION 034 RKS-25	509 (20)	1644 (65)		
ORION 050 RKS-06	453 (18)	1975 (78)		
ORION 050 RKS-10	495 (19)	1975 (78)		
ORION 050 RKS-25	509 (20)	2040 (80)		

### GENERAL SPECIFICATIONS

#### Design:

Industrial frame, painted to RAL 5010 Blue

Sanitary frame, stainless steel

	PED	ASME
DESIGN CODE:	PRESSURE EQUIPMENT DIRECTIVE PED EN 1.3445	ASME VIII DIV1
TEMPERATURE:	0 - 150°C MAX PRESSURE: 10 AND 16 BAR	UP TO 200°C - 10 BAR AND 20 BAR UP TO 392°F - 150 PSI AND 300 PSI

#### Materials:

Plates: Stainless steel EN 1.4301(AISI304), EN 1.4401(AISI316) or Titanium Gr 1

Gaskets: NBR or EPDM clipped

Connections: EN 1.4401, titanium or rubberlined

### TYPICAL APPLICATIONS

#### Food:

- Cooling/pasteurization of milk
- Whey
- Beer
- Wort

#### Industry:

- General heating and cooling duties

#### Marine:

- Water/Water
- Water/Oil

#### Energy:

- Hot tap water
- Central heating

#### SPX FLOW TECHNOLOGY

105 Crosspoint Parkway  
Getzville, NY 14068  
USA  
P: (800) 207-2708  
F: (716) 692-1715  
E: answers.us@apv.com

#### SPX FLOW TECHNOLOGY

666 Fengjin Road, Xidu Industrial Park  
Feng Xian District  
ShangHai 201401  
PR China  
P +86 21 6715 8181  
F +86 21 6715 8282



SPX Flow Technology, Platinvej 8, 6000 Kolding, Denmark  
P: +45 70 278 444 F: +45 70 278 445 E: apv.emea.heat@spx.com

For more information about our worldwide locations, approvals, certifications, and local representatives, please visit [www.spx.com](http://www.spx.com).

SPX Corporation reserves the right to incorporate our latest design and material changes without notice or obligation. Design features, materials of construction and dimensional data, as described in this bulletin, are provided for your information only and should not be relied upon unless confirmed in writing.

APV-1212-GB Version: 04/2011 Issued: 12/2011 COPYRIGHT © 2010, 2011 SPX Corporation